

XRN-3010

64CH Network Video Recorder




Key Features

- Up to 64CH, Max. 12megapixel camera supported
- Max. 300Mbps network camera recording
- Support 4K video out on HDMI monitor
- Support Dual monitor video out
- Support H.265, H.264, MJPEG compression
- WiseStream support
- Max. 8 internal HDDs (64TB), e-SATA storage support
- ARB & Failover (N+1) support

Dimensions

Unit : mm (inch)

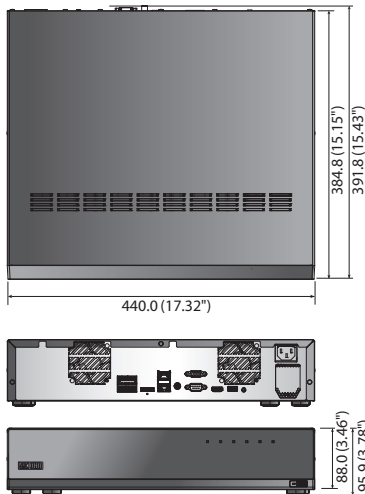

XRN-3010

DISPLAY		
Video	Inputs	Up to 64CH
	Resolution	CIF ~ 12MP
Live	Protocols	Samsung, ONVIF
	Local Display	1x HDMI, 1x VGA dual monitor
	Multi Screen Display	[Local monitor] 1 / 2V / 3V / 4 / 9 / 16 / 25 / 36 / Sequence, [Web] 1 / 4 / 9 / 16 / 25 / 36 / Sequence
	Performance	[Local monitor] 12MP (30fps), 8.3MP (120fps), 1080p (480fps), 720P (960fps), D1 (1560fps)
PERFORMANCE		
Operating System	Embedded	Linux
	Compression	H.265, H.264, MJPEG, WiseStream (H.265, H.264)
Recording	Recording Bandwidth	Max. 300Mbps
	Resolution	CIF ~ 12MP
	Mode	Normal, Schedule (Continuous / Event), Event (Pre / Post)
	Event Trigger	Alarm input (8), Video loss, Camera event (Sensor, MD, Video analytics, Defocus)
Search & Playback	Event Action	E-mail, PTZ preset, Alarm out, Buzzer, Monitor out
	Playback Bandwidth	32Mbps (16CH simultaneously)
	Performance	Max. 4 users (Local 1, Remote 3)
	Mode	Date & Time (Calendar) / Event log list / Text search / ARB search / Smart search (Virtual line w/direction, Enter / Exit)
Storage	Simultaneous Playback	Max. 16CH (Local monitor, CMS)
	Resolution	CIF ~ 12MP
	Fish-eye Dewarping	WEB / CMS
	Playback Control	Fast/Slow Forward/Backward, Move one step up/down
Backup	Default Built-In	0TB ~ 8TB
	Internal HDD	8 (Max. 64TB)
Sensor	File Backup (Via Web)	BU/Exe (GUI), JPG/AVI (Network)
	Function	Multi channel (Up to 16CH) play, Date-time/title display
Audio	Input / Output	8 / 4 (NO/NC selectable)
	Input	64CH (Network)
Audio Communication	Compression	G.711, G.726, AAC (16/48KHz)
	Audio Communication	2-way
NETWORK		
Interface		RJ-45, Gigabit ethernet x2
Protocol Support		TCP/IP, UDP/IP, RTP (UDP), RTP (TCP), RTSP, NTP, HTTP, DHCP (Server, Client), PPPoE, SMTP, ICMP, IGMP, ARP, DNS, DDNS, uPnP, HTTPS, SNMP, ONVIF (Profile-S), SUNAPI (Server, Client)
DDNS		Hanwha security DDNS
Transmission Bandwidth		512Mbps
Max. Remote Users		Search 3 / Live unicast 10 / Live multicast 20
IP		IPv4 / IPv6
Security		IP address filtering, User access log, 802.1x authentication, Encryption
Language		English, French, German, Italian, Spanish, Russian, Turkish, Polish, Dutch, Swedish, Czech, Portuguese, Danish, Rumanian, Serbian, Croatian, Hungarian, Greek, Norwegian, Finnish, Korean, Chinese, Japanese, Thai
OS		Window 7, 8, 10, Mac OS X (10.8 or above)
Web Browser		MS IE, Google Chrome, Mac Safari, Firefox
Viewer		SSM, Webviewer, SmartViewer, IPOLiS mobile viewer
Software		CMS Support
FUNCTIONS		
Register		Auto, Manual
Camera Setup	Register	IP address, Add profile edit, Bitrate, Compression, GOP, Quality, Camera MD setup, Camera video setup (Simple focus, Brightness/Contrast, Flip/Mirror, IRIS, WDR, D&N, SSNR, Shutter, SSSR, DIS), Fisheye dewarping mode, Hallway view setup, Camera webpage
	Setup Items	
PTZ	Control / Preset	Via GUI, Webviewer, SPC-2000 / 255 presets
	OS	Android, iOS
Smart Phone	Protocol Support	RTP, RTSP, HTTP, CGI (SUNAPI)
	Control	Live (16CH) : Multi-profile support, Playback (1CH)
	Max. Remote Users	Search 3 / Live unicast 10 / Live multicast 20
Redundancy	Failover / ARB	N + 1 (Include fail-back) / Yes
	System Control	Mouse, Web, SPC-2000 (Controller)
INDICATOR / INTERFACE		
Front	Indicator	LED (Status indicator) : 6ea HDD action 1, Alarm 1, Power 1, Record 1, Backup 1, Network1
	VGA	Sub : 1ea (Support live screen up to 16 div. mode)
	HDMI	Main : 1ea (Both support Live / PB / Setup) Support up to 4K (3840 x 2160, Single monitor mode)
Connections	Audio	Out 1ea (RCA, Line)
	Ethernet	RJ-45 2ea (LAN/WAN, 1Gbps)
	Alarm	In 8ea (Terminal block), Alarm reset 1ea Out 4ea (Terminal block) - Relay out1 (NO/NC/COM) - Relay out 2 ~ 4 (NO/COM)
	USB	2ea (Front 1, Rear 1)
	Storage	1 e-SATA
	Serial / Reset	RS-232C / Switch 1ea
	Power Cord	1ea AC Inlet
SYSTEM		
Log	Log List	Max. 20,000 (System log, Event log each)
GENERAL		
Electrical	Input Voltage / Current	100 ~ 240V AC ±10%, 50/60Hz / 4 ~ 1.5A
	Power Consumption	Max. 99W (338BTU, 8TB HDD x 8ea)
Environmental	Operating Temperature	+0°C ~ +40°C (+32°F ~ +104°F)
	Operating Humidity	20% ~ 85% RH
Mechanical	Color / Material	Black / Metal
	Dimensions (WxHxD)	440.0 x 88.0 x 384.8mm (17.32" x 3.46" x 15.15") (2U)
	Weight	4.86Kg (10.71 lb) (without HDD)

* The latest product information / specification can be found at hanwha-security.com
* Design and specifications are subject to change without notice.