



**S** ~~CD8371-HNTV~~

**S** CD8371-HNVF2

Corner Dome Network Camera

3MP · WDR Pro · SNV · 940nm IR · IK10+ · IP67 ·  
Anti-Ligature · Anti-Grip

VIVOTEK's CD8371-HNVF2/HNTV is a vandal-proof network camera specifically designed for prisons and correctional facilities. With up to 20 fps at 3-Megapixel resolution, 940nm IR illuminators, two-way audio, and available in either fixed lens (-HNVF2) or vari-focal (-HNTV), the CD8371-HNVF2/HNTV is the most feature rich prison cell surveillance camera available today. The CD8371-HNVF2/HNTV has an anti-ligature design to limit the possibilities of self inflicted harm or suicide, a required feature for environments like prisons, holding cells, psychiatric wards, mental hospitals, and correctional institutions.


Along with having an anti-ligature design, the CD8371-HNVF2/HNTV is designed to cover a wide area. Designed to be installed in the upper corner of a cell, the CD8371-HNVF2/HNTV has both a wide angle horizontal FOV (up to 108°) and

vertical FOV (up to 79°) enabling full coverage of a rectangular cell. Both models lenses also have a 15° vertical tilt to enable vertical view adjustments where needed. WDR Pro is included enabling better image quality where variable lighting is a concern as well as SNV technology to produce high-quality full-color surveillance under low-light conditions. These combined features, along with a built-in microphone, enable correctional officers, mental health evaluators, and prison guards to monitor all the activities of those under their supervision.

The CD8371-HNVF2/HNTV also supports the industry-standard H.264 compression technology, reducing file sizes and conserving network bandwidth. It also is ONVIF compliant, enabling integration with any existing Video Management Software or VIVOTEK's own VAST Central Management Software.

## Key Features

- 3-Megapixel CMOS Sensor
- 20 fps @ 2048x1536
- Anti-Ligature Design, Corner Dome Correctional Facility Camera
- Weather-proof IP67 rated and Vandal-proof IK10+ rated Housing
- Up to 108° Horizontal Field of View, Up to 79° Vertical Field of View
- 15° Tilt Lens
- Built-in Invisible 940nm IR Illuminators up to 10 Meters
- WDR Pro (100dB) for Improved Visibility in High Contrast Lighting Environments
- SNV (Supreme Night Visibility)
- Smart Stream II to Optimize Bandwidth Efficiency
- 3D Noise Reduction for Low-light Conditions
- Shock Detection - Advanced Tamper Detection if Camera is Attacked

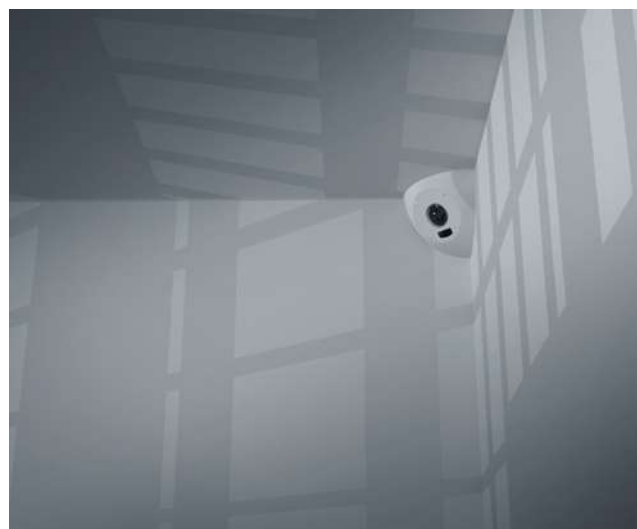

The Anti-Ligature, Robust Design, Corner Dome Correctional Facility Camera

# Technical Specifications

Model	<u>CD8371-HNTV: Vari-focal, Remote Focus</u> CD8371-HNVF2: Fixed-focal	Adjustable image size, quality and bit rate; Time stamp, text overlay, flip & mirror; Configurable brightness, contrast, saturation, sharpness, white balance, exposure control, gain, backlight compensation, privacy masks; Scheduled profile settings, 3D noise reduction, video rotation
<b>System Information</b>		<b>Image Settings</b>
CPU	Multimedia SoC (System-on-Chip)	
Flash	128MB	
RAM	256MB	
<b>Camera Features</b>		<b>Audio</b>
Image Sensor	1/2.8" Progressive CMOS	<b>Audio Capability</b> Two-way audio
Maximum Resolution	2048x1536 (3MP)	<b>Compression</b> G.711, G.726
Lens Type	<u>CD8371-HNTV: Vari-focal, Remote Focus</u> CD8371-HNVF2: Fixed-focal	<b>Interface</b> Built-in microphone External microphone input External line output
Focal Length	<u>CD8371-HNTV: f= 2.8 ~ 8 mm</u> CD8371-HNVF2: f= 2.8 mm	<b>Effective Range</b> 5 Meters
Aperture	<u>CD8371-HNTV: F1.6</u> CD8371-HNVF2: F1.8	<b>Network</b>
Field of View	<del>CD8371-HNTV: 51°-105° (Horizontal) 37°-72° (Vertical) 63°-140° (Diagonal)</del> CD8371-HNVF2: 108° (Horizontal) 79° (Vertical) 137° (Diagonal)	<b>Users</b> Live viewing for up to 10 clients
Shutter Time	1/5 sec. to 1/32,000 sec.	<b>Protocols</b> IPv4, IPv6, TCP/IP, HTTP, HTTPS, UPnP, RTSP/RTP/RTCP, IGMP, SMTP, FTP, DHCP, NTP, DNS, DDNS, PPPoE, CoS, QoS, SNMP, 802.1X, ARP, SSL, TLS, CIFS/SMB
WDR Technology	WDR Pro	<b>Interface</b> 10Base-T/100 BaseTX Ethernet (RJ-45) *It is highly recommended to use standard Cat. 5e & Cat. 6 cables which are compliant with the 3P/ETL standard.
Day/Night	Removable IR-cut filter for day & night function	<b>ONVIF</b> Supported, specification available at <a href="http://www.onvif.org">www.onvif.org</a>
Minimum Illumination	<del>CD8371-HNTV: 0.01 Lux @ F1.6 (Color) &lt; 0.01 Lux @ F1.6 (B/W) 0 Lux with IR illumination on</del> CD8371-HNVF2: 0.01 Lux @ F1.8 (Color) < 0.01 Lux @ F1.8 (B/W) 0 Lux with IR illumination on	<b>Intelligent Video</b>
Tilt Range	15°	<b>Video Motion Detection</b> Five-window video motion detection
Pan/Tilt/Zoom Functionalities	ePTZ: 48x digital zoom (4x on IE plug-in, 12x built in)	<b>Alarm and Event</b>
IR Illuminators	Built-in 940nm IR illuminators, effective up to 10 meters with Smart IR	<b>Alarm Triggers</b> Motion detection, manual trigger, digital input, periodical trigger, system boot, recording notification, camera tampering detection, audio detection, shock detection, MicroSD card life expectancy
On-board Storage	Slot type: MicroSD/SDHC/SDXC card slot Seamless Recording	<b>Alarm Events</b> Event notification using HTTP, SMTP, FTP, NAS server and MicroSD Card File upload via HTTP, SMTP, FTP, NAS server and MicroSD card
<b>Video</b>		<b>General</b>
Compression	H.264 & MJPEG	<b>Smart Focus System</b> Remote Focus (CD8371-HNTV)
Maximum Frame Rate	20 fps @ 2048x1536	<b>Connectors</b> RJ-45 cable connector for Network/PoE connection Audio input Audio output (Optional) DC 12V power input (Optional) AC 24V power input (Optional) Digital input*1 (Optional) Digital output*1 (Optional)
Maximum Streams	3 simultaneous streams	<b>LED Indicator</b> System power and status indicator
S/N Ratio	55dB	<b>Power Input</b> DC 12V AC 24V IEEE 802.3af PoE Class 2
Dynamic Range	100dB	<b>Power Consumption</b> Max. 6.2 W
Video Streaming	Adjustable resolution, quality and constant bit rate control; Smart Stream II	<b>Dimensions</b> 226 x 221 x 112 mm

## Technical Specifications

Weight	CD8371-HNTV: 1537 g CD8371-HNVF2: 1522 g
Casing	Weather-proof IP67 rated housing Vandal-proof IK10+ rated metal housing
Safety Certifications	CE, LVD, FCC Class A, VCCI, C-Tick, UL
Operating Temperature	Starting Temperature: -10°C ~ 55°C (14°F ~ 131°F) Working Temperature: -10°C ~ 55°C (14°F ~ 131°F)
Warranty	36 months
<b>System Requirements</b>	
Operating System	Microsoft Windows 8/7
Web Browser	Internet Explorer 10/11 Chrome version 58.0.3029 or above
Other Players	VLC: 1.1.11 or above Quicktime: 7 or above

### Included Accessories

Others	Quick installation guide, warranty card, alignment sticker, desiccant bag, screw driver, screws pack, I/O cable, mounting bracket
--------	---

### Dimensions

